


Model: ADVANCE 1L ASH

Codes: 100317043

Group: G-244


Format: 218X19,8X1,4CM

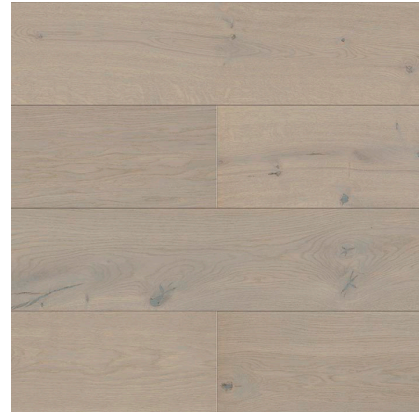

ADDITIONAL NOTES

Due to better usage of the wood, any order of this reference may contain mean percentage boards of between 15% y 20%. While the color of the skirting boards, profiles, and step borders may vary depending on the model, the color shall be as similar as possible to the wood floor.

COMPOSITION























| | Size | Material | Type of material |
|---------|-------------|--------------------|------------------------|
| Layer 1 | 0.060-0.070 | Varnish | Apresto Mate treatment |
| Layer 2 | 3 | Hardwood Layer | Oak wood |
| Layer 3 | 9 | Intermediate Layer | Wood or HDF slats |
| Layer 4 | 2 | Backside | Coniferous wood |

LABORATORY TESTS

| | | |
|--------------------------------|--------------|-------------------------------|
| Resistance to abrasion | ≥500 | UNE-EN 13696* |
| Thermal conductivity | 0.17 W/M*K | UNE-EN 12667:2002* |
| Heat resistance | 0.082 M2*K/W | UNE-EN 12667:2002* |
| Formaldehyde emissions | E1 | EN 717* |
| Gluing resistance | ≥D3 | EN 204* |
| Moisture content | 5-9 % | UNE-EN 13183-1/AC:2004* |
| Flammability | Dfl-s1 | EN 13501* |
| Bulk density | 785 KG/M3 | UNE-EN 323:1994* |
| Biological durability | Clase 1 | UNE EN 335 -1 ; UNE EN 335-2* |
| Slip resistance (pendulum-wet) | CL 1 (30) | UNE 41901* |
| Slip resistance (pendulum-dry) | CL 3 (50) | UNE 41902* |
| Slip resistance (dcof) | 0.43 | ANSI A137.1* |



FEATURES

-  Safety and joint durability are the main features of this easy installation system that guarantees the elimination of gaps between boards throughout the floor's lifetime. The pressure exerted between boards reinforces the union and prevents it from being carried out incorrectly.
-  Applying a color oil or varnish on the wood surface in order to get different color ranges.
-  L'ANTIC COLONIAL's varnishing, in two finishes, APRESTO (gloss) and APRESTO MATE (matte), provides a unique surface quality that satisfies the most demanding requirements. Advantages: It achieves the highest cleanliness because, since the pores are sealed, dirt and dust remain on the surface and can be easily cleaned.
-  Is suitable for installing on water radiant heating
-  Material with many knots on its surface that can have different sizes depending on the type of wood. These, along with any cracks that may appear, are covered with putty.
-  Installation system where gluing the boards to the floor is not necessary. They are placed on a foam, joined together, as long as the product does not already have a foil on the back of the piece.
-  There are consistent color changes between pieces.
-  Material from a European country.
-  Structure formed by an upper layer that shows the noble aspect of the material, an intermediate layer of wood of different typology, depending on the collection, or HDF board that compensates the tensions between the different parts and a lower plywood that provides dimensional stability.
-  It is necessary to apply adhesive for installing it.
-  Slight smoothing of the wood using a brush to achieve a surface with a slight relief.
-  Beveled cut on all 4 edges of the board for emphasizing size
-  Quality product made with selected raw materials, guaranteeing its full residential use for 30 years as provided by L' Antic Colonial.
-  Format where only one board has been used to finish the entire base surface
-  It is necessary to apply adhesive for installing it.
-  Made with oak wood.
-  Material from a North American country.
-  PanEuropean Forest Certification that guarantees to consumers the origin of the products from sustainably managed forests
-  3 mm
-  Installation system where gluing the boards to the floor is not necessary. They are placed on a foam, joined together, as long as the product does not already have a foil on the back of the piece.

PACKING

| | | |
|------------------------------|-------------------|--|
| Sales units per box | 3.02148 M2/BOX | |
| Sales units per pallet | 105.751799 M2/PAL | |
| Sales units per square meter | 1 M2 | |
| Sale unit | M2 | |
| Base unit | ST | |
| Net weight | 12.2579 KG/M2 | |
| Gross weight | 12.716616 KG/M2 | |

SPECIAL PIECES

| SAP | Description | Group | Boxes | Pallet | Units | SKU | Basic Unit | Net Weight | Gross weight |
|-----------|------------------------------------|-------|---------------|-----------------|----------------|-----|------------|----------------|----------------|
| 100317025 | IGUALACION ADVANCE ASH 4,5X270X1,3 | G-161 | 10 PIECES/BOX | 1000 PIECES/PAL | 8.23 PIECES/M2 | - | - | 1 KG/PIECES | 1.02 KG/PIECES |
| 100317050 | MAMPERLAN ADVANCE 1L ASH 7X120X3 | G-163 | 2 PIECES/BOX | 200 PIECES/PAL | 11.9 PIECES/M2 | - | - | 1.58 KG/PIECES | 1.64 KG/PIECES |
| 100317028 | TRANSICION ADVANCE ASH 4X270X1,3 | G-161 | 10 PIECES/BOX | 1000 PIECES/PAL | 9.26 PIECES/M2 | - | - | 1 KG/PIECES | 1.02 KG/PIECES |
| 100317060 | ZOCALO ADVANCE ASH 8X220X1,4 | G-128 | 12 PIECES/BOX | 600 PIECES/PAL | 5.68 PIECES/M2 | - | - | 1.33 KG/PIECES | 1.38 KG/PIECES |

