


Model: LINKFLOOR SUPREME BROWN


Codes: 100330816

Group: G-230

Format: 23X226X0,75CM

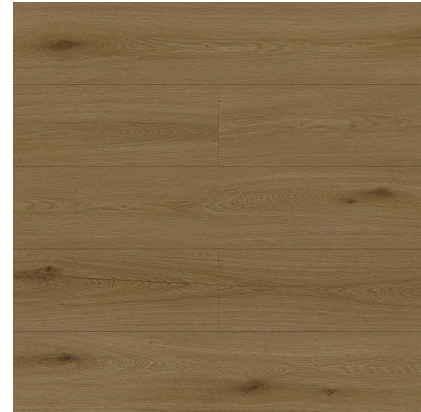

COMPOSITION





	Size	Material	Type of material
Layer 1	0.7	Wear layer	Use layer with PU protection
Layer 2	0.1	Vinyl	decorative film
Layer 3	5,7	SPC	SPC core
Layer 4	1	IXPE	IXPE motherboard


ADDITIONAL NOTES


COMPOSITION: Engineered SPC Enhanced Resilient Multi-Layer Vinyl Plank / Tile


FEATURES


- 


Imitates the surface of wood
- 


Water and moisture resistant flooring, suitable for wet areas such as bathrooms and kitchens for residential use, provided the product's installation instructions are followed.
- 

25 year warranty for domestic use valid for vinyl materials that have been installed in rooms where they are exposed to normal wear and tear for their recommended End Use Category in accordance with ISO 10582.
- 

Floor capable of dissipating excess electrical charges and distribute them over its entire surface
- 

Installation system where gluing the boards to the floor is not necessary. They are placed on a foam, joined together, as long as the product does not already have a foil on the back of the piece.
- 

10 year warranty for commercial use valid for vinyl materials that have been installed in rooms where they are exposed to normal wear and tear for their recommended End Use Category in accordance with ISO 10582.
- 

Is suitable for installing on water radiant heating
- 

There are consistent color changes between pieces.



LABORATORY TESTS

Commercial area class	34	EN 10582*
Slip resistance (r)	≥R9	DIN 51130*
Abrasion resistance	≥6000	EN 13329*
Impact resistance	2000 mm/45 N	EN 438-2*
Resistance to staining	GRUPO 1 y 2: GRADO 5 GRUPO3: GRADO 4	EN 438-2*
Swelling in thickness	≤12 %	ISO 24336*
Dimensional stability	LD:-0.13%/MD: 0.11%	ISO 23999*
Resistance to microscratching	MSR-A1/MSR-B1	EN 16094*
Formaldehyde emissions	E1	EN 14041 EN 717-1*
Slip resistance (pendulum-wet)	CL 1 (24)	UNE 41901*
Tensile strength of joints	Longitudinal=3.6 kN/m; Transversal=2.7 kN/m	ISO 24334*
Fire resistance	Bfl-S1	EN 13501*
Evaluation of propensity to accumulation of electrostatic charges	0.81 KV	EN 1815*
Heat resistance	0.047 M2*K/W	EN 12667*
Thermal conductivity	0.161 W/M*K	EN 12664*
Uv light fastness	≥Grado 6	ISO 105*
Residual footprint	0.04 MM	EN ISO 24343-1*
Acoustic insulation	Ln,w=43 dB;Rw=67 dB ; ΔLw=19 dB	ISO 717-2 ; ISO 717-1*
Dynamic coefficient of friction	0.63	ANSI A137.1*
Residual footprint	0.07 MM	
Residual footprint	≤0.1 mm	*
Resistance to chemicals	PASS	EN ISO 26987*
Private area class	23	EN 10582*
Slip resistance (pendulum-dry)	CL 3 (83)	UNE 41902*

PACKING

Sales units per box	1.5594 M2/BOX	
Sales units per pallet	70.173 M2/PAL	
Sales units per unit	0.5198 M2/PIECE	
Sale unit	M2	
Base unit	ST	
Sales units per square meter	1 M2	
Net weight	13.370527 KG/M2	
Gross weight	13.838015 KG/M2	

SPECIAL PIECES

SAP	Description	Group	Boxes	Pallet	Units	SKU	Basic Unit	Net Weight	Gross weight
100257147	PERFIL ADH LINKFLOOR ALUMINIO 3,5X270	G-121	40 PIECES/BOX	1000 PIECES/PAL	10.58 PIECES/M2	-	-	0.37 KG/PIECES	0.39 KG/PIECES
100330850	PERFIL ADH LINKFLOOR SUPREME BROWN 3,5	G-155	20 PIECES/BOX	1000 PIECES/PAL	9.26 PIECES/M2	-	-	0.77 KG/PIECES	0.8 KG/PIECES
100330819	ZOCALO LINKFLOOR SUPREME BROWN 8X220X1,5	G-121	14 PIECES/BOX	560 PIECES/PAL	5.68 PIECES/M2	-	-	1.33 KG/PIECES	1.38 KG/PIECES

